




Renault Transponder Emulator fitting instructions.
Suitable for Clio2/Kangoo/Master/Movano etc from about 02 on

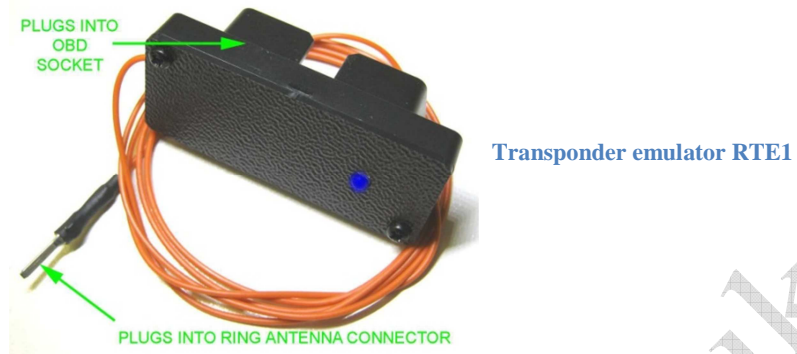


Step 1 With ignition OFF remove cowl from steering column to expose ignition switch and 'ring decoder unit. Clio shown below...remove screws arrowed.

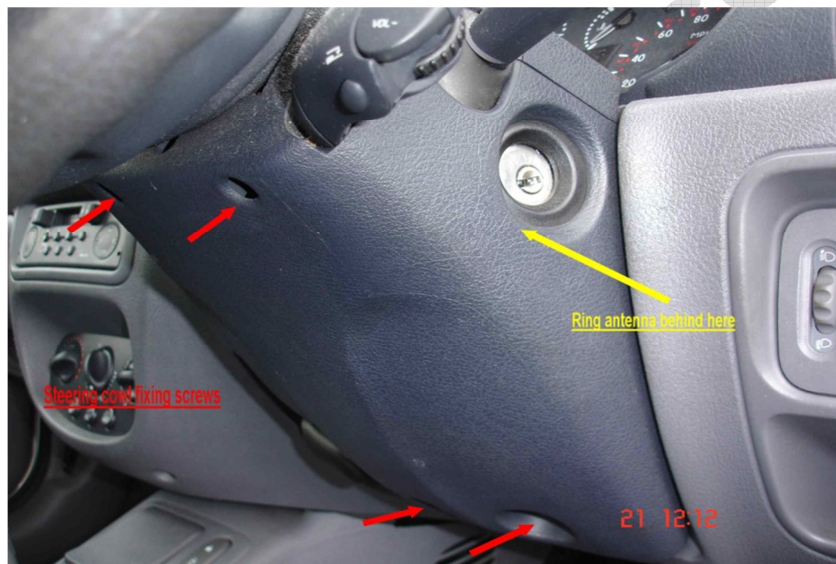

Ring decoder unit looks like this picture below and is shown removed from the vehicle for clarity. You do not need to remove it just disconnect the 4 pin connector

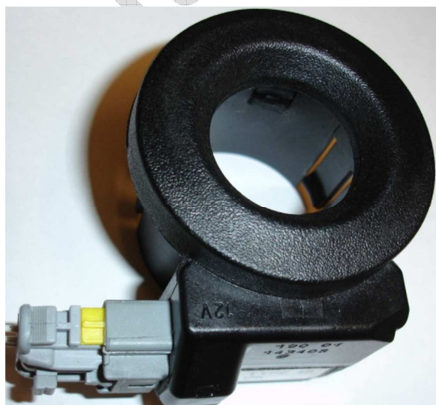

Ring decoder unit

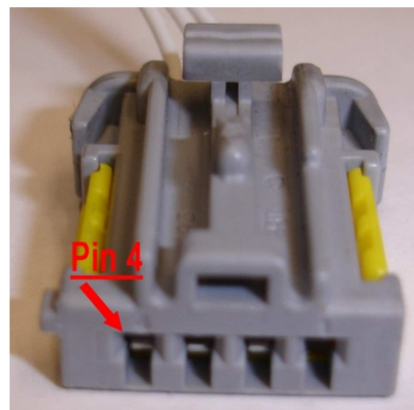


Ring decoder connector shown disconnected Pin 4

Step 2 Locate vehicle diagnostic socket.

Step 3 Place emulator on diagnostic socket (do not connect the single wire from the Emulator to the Ring Decoder plug) and wait for blue led on emulator to go out

Step 4 Now locate cavity 4 on the disconnected Ring Decoder plug and push male spade into cavity. Plug is numbered at wiring harness end..... See below.

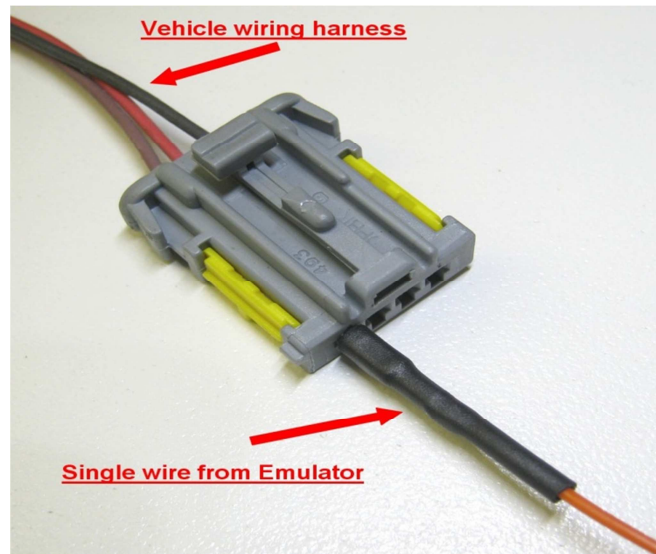

Step 5 Secure the Ring decoder plug so that wire from the emulator can't be dislodged.

Now to start the vehicle to confirm fitting is OK. Leave Emulator and connecting wire in place and use vehicle as normal.